

Preprint: **CWRU-P02-02**
 Submitted to *The Astrophysical Journal*

Improving the Resolution of X-Ray Telescopes with Occulting Satellites

Craig J. Copi¹ and Glenn D. Starkman¹

cjc5@po.cwru.edu & gds6@po.cwru.edu

ABSTRACT

Improving angular resolution is one of X-ray astronomy's big challenges. While X-ray interferometry should eventually vastly improve broad-band angular resolution, in the near-term, X-ray telescopes will sacrifice angular resolution for increased collecting area and energy resolution. Natural occultations have long been used to study sources on small angular scales, but are limited by short transit times and the rarity of transits. We describe here how one can make use of an *X-ray Occulting Steerable Satellite (XOSS)* to achieve very-high resolution of X-ray sources, conventional X-ray telescopes. Similar occulting satellites could also be deployed in conjunction with future space observatories in other wavebands.

Subject headings: space vehicles—occultations—X-rays:general

1. Introduction

One challenge of X-ray astronomy is the relatively low photon fluxes from target sources. X-ray telescope builders are forced to trade angular resolution against increased collecting area. Thus, while the diffraction limit of a 1.2 m aperture X-ray telescope (such as Chandra) is 0.3 mas at 1 keV, the 0.5 as reality is worse than what is routinely achieved at longer wavelengths. While development proceeds on space-based X-ray interferometers, near-future X-ray missions such as *Constellation X* plan to increase effective area at the price of reduced angular resolution. *MAXIM Pathfinder*, which will afford 100 μ as resolution, hopes to launch between 2008 and 2013; however, it will have an effective area of only 100 cm².

¹Department of Physics, Case Western Reserve University, Cleveland, OH 44106-7079

In the interim, angular resolution can be substantially improved for bright, relatively stable sources. The general technique to do this is well-known—eclipse mapping. When a body such as the moon transits a telescope’s field-of-view (FOV), it occults different sources within the FOV at different times. By carefully measuring the photon count rate as a function of time during the transit, one can reconstruct the projection of the surface brightness in the FOV onto the path of the occulter.

Deployment of large occulting satellites has been discussed for the optical and near infrared (Adams et al. 1988; Schneider 1995; Copi & Starkman 1998; Copi & Starkman 2000), for both planet finding and high-resolution astronomy. However, occulting satellites are particularly well-suited for use in the X-ray. In the X-ray, the diffraction of the photons by the satellite can generally be neglected (see section 3 below). The optimal size and placement of the satellite are therefore governed chiefly by one’s ability to accurately position the satellite and station-keep with respect to the line-of-sight to the source. The achievable resolution is then determined primarily by the telescope collecting area and by the level to which one can zero the *XOSS*-telescope relative velocity.

We consider an X-ray telescope at the the Earth-Sun system’s second Lagrange point (L2) (such as *Constellation X*). We discuss the size and steering of a *XOSS* in section 2. In section 3 we present the two-source angular resolution as a function of the *XOSS*-telescope relative angular velocity and of the photon count rate. In section 4 we reconstruct some test sources. Specific classes of sources are discussed briefly in section 5. Section 6 contains our conclusions.

2. Building and Using a *XOSS*

Locating *XOSS*: All current and some future X-ray telescopes use Earth orbit. Because orbital velocities are so high there, it is more difficult to use the approach we describe here; we will not discuss these further. Other X-ray telescopes, such as *Constellation X*, will be located at L2 or other low-acceleration environment (e.g. Earth-trailing and drift away orbits). We focus on these.

We have previously discussed in detail placing a large occulter at L2 (Copi & Starkman 2000). Here we highlight the main points. Orbits around L2, both in and out of the ecliptic, have periods $\tau \simeq 6$ months, nearly independent of their size (for $d \lesssim 10^4$ km). Consider an X-ray telescope at L2 and a *XOSS* orbiting it at a distance d . The typical orbital acceleration is $a = 4\pi^2 d / \tau^2$. Suppose initially *XOSS* and the telescope are at relative rest. We require their relative velocity through a transit to be less than some v , the smaller v , the better the

expected angular resolution. For a satellite of size L , the transit duration is $t = L/v$, so we need $at < v$. In terms of the angular velocity, $\mu = v/d$, the constraint is

$$\mu > \frac{\sqrt{aL}}{d} = 0.26 \sqrt{\left(\frac{L}{10 \text{ m}}\right) \left(\frac{10^6 \text{ m}}{d}\right)} \frac{\text{mas}}{\text{s}}. \quad (1)$$

This is the typical relative angular velocity assuming no orbital adjustments are made. Much smaller relative angular velocities can be achieved. Drifts of 1 m off the line-of-site can take days, if the relative-velocity perpendicular to the line-of-sight is initially zeroed (using thrusters).

Building XOSS The attenuation length of X-rays in matter is well known (Hagiwara et al. 2002). Except in hydrogen, it is approximately $3 \times 10^{-4} \text{ g/cm}^2$ at 1 keV, 10^{-2} g/cm^2 at 10 keV, and 0.2 g/cm^2 at 100 keV. At a density of 3 g/cm^3 , these represent thicknesses of 1, 30 and 600 microns respectively. An occulter needs to be ~ 3 attenuation lengths thick, and so for a 10 m square $\sim 1 \text{ kg}$ to operate at 1 keV, 30 kg at 10 keV. Even at 100 keV a $3 \text{ m} \times 3 \text{ m}$ lead film three attenuation lengths thick would be only 60 kg.

The ideal size for XOSS depends on the telescope aperture, the accuracy with which one can position the occulter, and the telescope field-of-view (FOV). A typical X-ray aperture, which is the minimum occulter size, is $\sim 1 \text{ m}$. Next we estimate how well we can find XOSS's position relative to the line-of-site. Let r be the telescope-XOSS separation. With a diffraction-limited optical telescope of diameter d on one spacecraft one can establish the relative position of the other to

$$\delta x < 1.2r \frac{\lambda}{d} = 0.5 \text{ m} \frac{r}{1000 \text{ km}} \frac{\lambda/400 \text{ nm}}{d/1 \text{ m}} \quad (2)$$

1 m accuracy at 1000 km separation therefore requires a 50 cm finder scope. With isotropic scattering from the target, and a reflecting area of 1 m^2 , sunlight results in a flux of $3 \times 10^8 \text{ m}^2/\text{s}$, at 1000 km, suggesting that sufficient light is available to determine relative positions to $\sim 1 \text{ m}$ or less.

We must also be able to reduce the spacecrafts' relative velocity to $\ll 1 \text{ m/s}$. In principle, two position determinations each with error of Δx , made a time t apart, determine the velocity within $\Delta v \simeq \sqrt{2}\Delta x/t$ (assuming no error in t). The ability to reduce $|\Delta v|$ is then constrained by the precision control on the impulse rockets, and by the maximum time between position determinations. This time is limited by the orbital accelerations, but is sufficiently long ($\gg 10^3 \text{ s}$) at L2.

Existing or planned X-ray telescopes that could be used with XOSS have large FOV. If XOSS covers only part of the FOV, the rest will contribute a large background. This

can be mitigated by monitoring each telescope resolution element. For *Constellation-X* with $\Delta\theta \simeq 15$ as this would still require a 70 m XOSS at 1000 km separation, though the full resolution element need not be occulted since some background is acceptable. Occulters of this scale have been previously considered (Copi & Starkman 2000). Still, this provides an important constraint on the size and distance of *XOSS*; alternatively it suggests that an X-ray telescope with somewhat higher resolution would be a better detector for *XOSS*.

Steering XOSS To transit multiple sources it will be necessary to accelerate the satellite both to retarget, and to velocity-match. For an areal density of just 1.5×10^{-3} g/cm² (five attenuation lengths at 1 keV), solar radiation pressure causes an acceleration of only 4×10^{-4} m/s². All velocity adjustments will therefore require rockets.

A change Δv in the satellite’s velocity is related by momentum conservation to the mass of propellant ejected and the velocity of ejection:

$$\Delta v_{\text{sat}} = (\Delta m_{\text{propellant}} / m_{\text{sat}}) v_{\text{ejection}} \quad (3)$$

If N is the desired number of velocity changes, then we must keep $\Delta m_{\text{propellant}} \leq m_{\text{sat}} / N$. Ion engines currently have $v_{\text{ejection}} \simeq 30$ km/s, thus

$$N \leq 30 \text{ km/s} / \Delta v_{\text{sat}}. \quad (4)$$

For satellites separated by 1000 km near L2, relative velocities are only $v_{\text{sat}} = \mathcal{O}(10^{-4} \text{ km/s})$, suggesting that propellant supply is not a concern.

3. Resolution

The angular resolution of the XOSS-telescope system will come from probing the lightcurve during a transit. Consider first identifying a binary source. For 0.5 keV X-rays edge diffraction from XOSS causes oscillations of order 5 cm in the aperture plane of a telescope 1000 km away. A 1-m aperture telescope averages over many such oscillations leading to very small deviations from the geometric shadow, which are further reduced at higher energies. Determining the lightcurve therefore reduces to calculating the area of the telescope not shadowed by XOSS. An observation consists of a sequence of measurements of the integrated lightcurve between times t_{j-1} and t_j . We would like to find the minimum separation of two sources that can be distinguished from a single source, using such observations. We therefore calculate the probability of misidentifying a binary source as a single source. This probability depends on $\mu_{\perp}$, the angular velocity of *XOSS* as it transits, and on the photon count rate. (Throughout we quote photon rates in the detector, not at the the telescope aperture. The X-ray

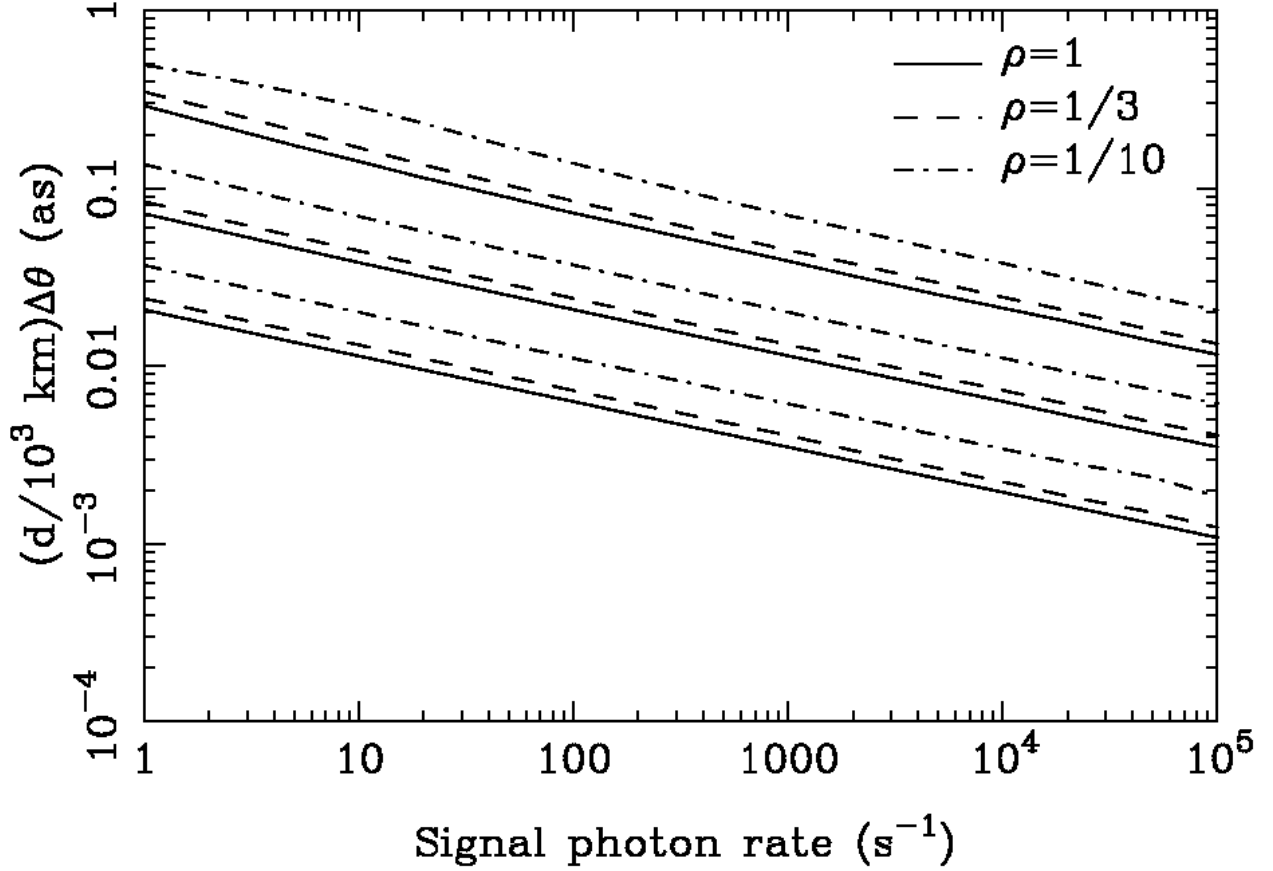


Fig. 1.— The minimum angular separation of two X-ray sources resolvable at the 95% C.L. Limits are shown for intensity ratios $\rho = 1$ (solid), $1/3$ (dashed), and $1/10$ (dashed-dotted). The three sets of curves are for $\mu_{\perp} = 10$ mas/s (upper), 1 mas/s (middle), and 0.1 mas/s (lower). The total photon from both sources detected in (not incident on) the unocculted telescope. A background equal to the flux of the two sources is assumed. Here d is the XOSS-telescope distance.

telescope’s effective area includes both the geometric collecting area and the efficiency of the X-ray detector.) The results for the 95% confidence limits as a function of the intensity in a 1.2 m aperture telescope for $\rho = 1, 1/3$, and $1/10$ and for $\mu_{\perp}/(\text{mas/s}) = 10, 1$, and 0.1 are shown in figure 1. In producing figure 1 we assumed a uniform response over the surface of the telescope. A more complicated response function may improve resolution slightly.

This analysis assumed a single transit by a square occulter, yielding only one projection of the source positions. One needs multiple projections to resolve a 2-d source. This could be accomplished by multiple transits, or slits in *XOSS* tilted to mimic multiple passes in a single transit.

4. Image Reconstruction

Several techniques have been applied to image reconstruction from natural eclipses. We have focused on the eclipse mapping method (Baptista & Steiner 1991). EMM is a maximum entropy technique, thus it can oversmooth the image or introduce spurious sources depending on the weighting between the entropy and the constraints. We have implemented an improved EMM algorithm (Baptista & Steiner 1993), in which we maximize the quality function

$$Q = S - [C(\chi^2)]^2/\rho - [C(R)/\rho]^2 \quad (5)$$

where S is the entropy, the usual definition of χ^2 is used, $C(x) = (x - x_{\text{aim}})/x_{\text{aim}}$,

$$R = \frac{1}{\sqrt{M-1}} \sum_{j=1}^{M-1} r_j r_{j+1} \quad (6)$$

measures the correlations in the residuals, and ρ controls the weighting between the entropy and the constraints. We anneal in ρ from 100 to 10^{-4} , to allow first the entropy to smooth the image then the constraints to sharpen the important features. In practice we tend to oversmooth, leading to a conservative estimate of the attainable resolution.

We modified the EMM algorithm. In the geometric limit, sources contribute to changes in the lightcurve while they are occulted. We therefore give more weight to pixels that are causing the light curve to change. A minimum pixel intensity is chosen; pixels above threshold count fully in the fit while those below the minimum are averaged over. Again we anneal from a high value for this intensity threshold to a low value.

To start the reconstruction we could use a low resolution image. For the test cases considered here we instead bootstrap by initially performing a non-negative least squares fit. Most of the signal is typically placed in a few very bright pixels—to speed up convergence,

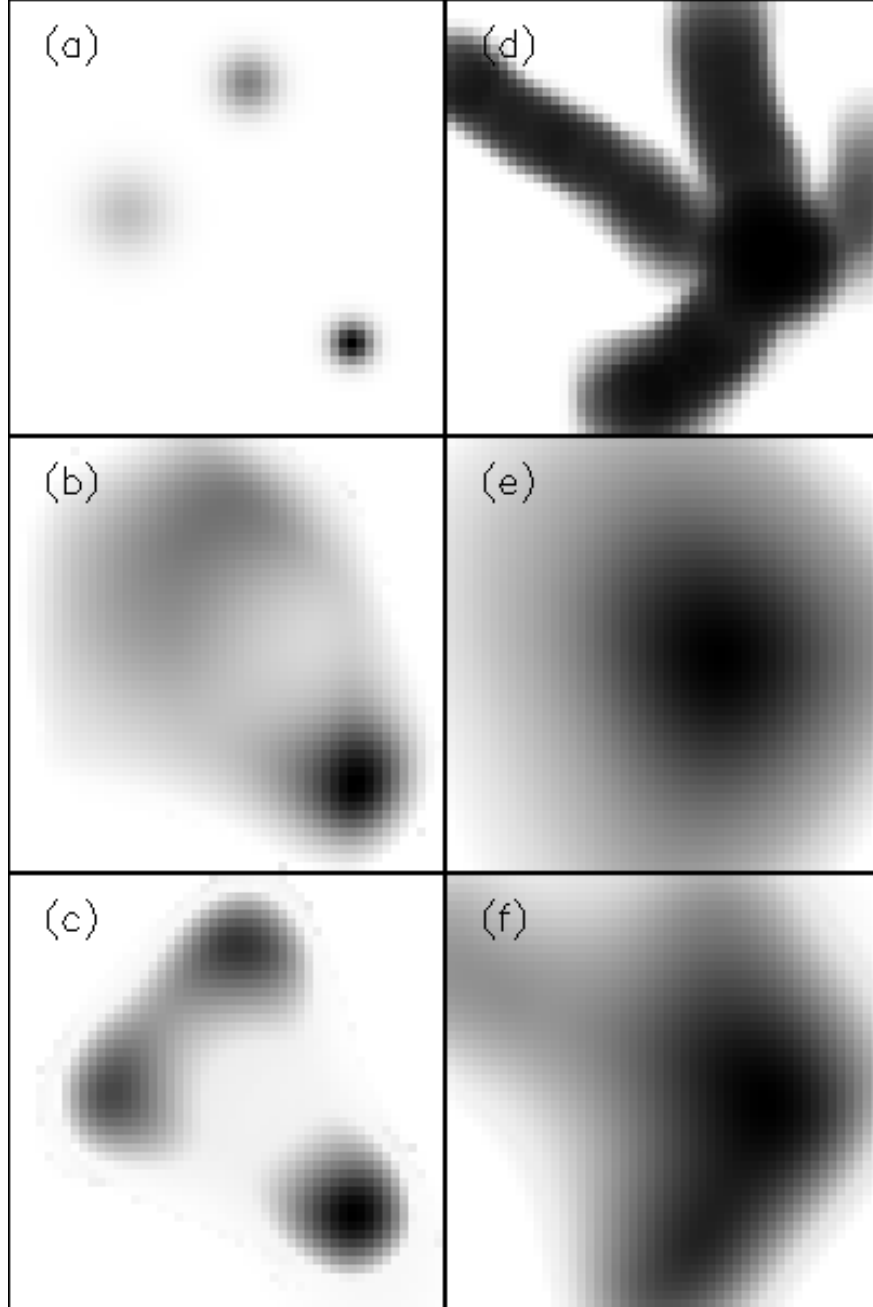


Fig. 2.— The image reconstruction of (a) Gaussian point sources and (d) filaments. Reconstructed images after 4 passes (b and e) and 16 passes (c and f) show the reconstruction ability of *XOSS*.

we presmooth the image with a Gaussian. The smoothing scale must be chosen with some care. Smoothing on the scale of a few pixels worked well for our test cases.

Two test cases have been considered (Fig. 2 panels (a) and (d) contain the original sources). The first contains three Gaussian sources of equal integrated intensity but peak intensities in a 4:2:1 ratio. The second contains filaments radiating from a bright spot. The reconstructions are performed for a $10^3\gamma/\text{snapshot}$ source. *XOSS* moves 1 pixel per snapshot. The square satellite provides information along only 1 direction per transit. Thus we consider (b,e) 4 and (d,f) 16 passes for each reconstruction. To extract maximal information from N passes, each pass the occulter travels at an angle $\theta = \pi/N$ to the previous pass.

For the Gaussian source the reconstructions are oversmoothed. By 4 passes (b) we can resolve at least two sources; with 16 passes (c) all three sources can be resolved. For the filamentary source the 4 passes (e) reconstruct the bright spot well. With 16 passes (f) the filaments are resolved. Even though the reconstruction technique involves Gaussian smoothing, non-Gaussian structures can be resolved.

5. Results

This is an exciting time for X-ray astronomy. The *Chandra* and *XMM* telescopes have been inserted into Earth orbit. Other major observatories are being planned for this decade: *Astro-E2*, and *XEUS* will enter Earth-orbit, while *Constellation X* will be placed at L2. *MAXIM Pathfinder*—the first astronomical X-ray interferometer—may launch between 2008 and 2013 into a drift-away orbit; to be followed eventually by *MAXIM*. This may seem a remarkable proliferation, but each mission has its own emphasis. *Chandra* is the only high angular resolution telescope, with $\Delta\theta \simeq 0.5$ as, and thus has the lowest effective area. The other missions (excepting the interferometers) opt instead for large effective area.

The luminosity of X-ray sources varies greatly. Black holes in the cores of nearby galaxies have

$$\mathcal{L}_{\text{bh}} \approx 10^{38-40} \text{ erg/s} = 6.2 \times 10^{46-48} \text{ keV/s} \quad (7)$$

in the 0.2–2.4 keV energy range. This leads to a photon rate at the detector of

$$\Gamma_{\text{bh}} = 6.5 \times 10^{0-2} \frac{E_{\text{keV}}}{d_{\text{Mpc}}^2 \mathcal{A}_{1000}} \text{ s}^{-1}, \quad (8)$$

where E_{keV} is the X-ray energy in keV, d_{Mpc} is the source distance in Mpc and $\mathcal{A}_{1000}$ is the effective area of the telescope in units of 1000cm^2 . An AGN, Seyfert galaxy, or the core of an

X-ray cluster can be much more luminous $\mathcal{L}_{\text{AGN}} \approx 10^{40-44}$ erg/s; however, since $d \approx 100$ Mpc

$$\Gamma_{\text{AGN}} = 6.5 \times 10^{(-2 \text{ to } +2)} \frac{10^4 E_{\text{keV}}}{d_{\text{Mpc}}^2 A_{1000}} \text{ s}^{-1}. \quad (9)$$

Galactic microquasars are less luminous $\mathcal{L}_{\text{microquasar}} \approx 10^{39}$ erg/s, but, since they are closer

$$\Gamma_{\text{microquasar}} = 6.5 \times 10^5 \frac{10^{-4} E_{\text{keV}}}{d_{\text{Mpc}}^2 A_{1000}} \text{ s}^{-1}. \quad (10)$$

Great improvements in resolution are readily accessible (figure 1). Sub-milliarcsecond resolution can be obtained for sources with photon rates $\Gamma \gtrsim 1000 \text{ s}^{-1}$. For a single *Constellation X* module, which will have an effective area of about $3,750 \text{ cm}^2$, the brightest AGNs, X-ray cluster cores, and galactic black holes will have $\Gamma \approx 200 \text{ s}^{-1}$ so we can obtain $\Delta\theta \approx 5 \text{ mas}$.

This technique has clearest application to steady sources. The occulter transit time is

$$t_{\text{transit}} = 1000 \text{ s} \left(\frac{F}{\text{as}} \right) \left(\frac{\text{mas/s}}{\mu} \right), \quad (11)$$

where F is the telescope FOV or resolution, whichever is less. The required source-stability timescale is t_{transit} times the number of passes. Many extragalactic sources are sufficiently stable. These include galaxy clusters, AGNs, quasars, and many X-ray jets; so too are supernovae. Galactic sources, however, often vary more quickly. It may nevertheless be possible to learn something about them using this technique. In particular, optimization of the aperture (e.g. by use of coded masks) may allow us to significantly reduce both the required transit time and the required number of transits to obtain a well-resolved 2-d image.

6. Conclusions

We have found that a *XOSS* can lead to tremendous improvements in angular resolution. The current trend of increasing the effective area of X-ray telescopes at the expense of angular resolution until X-ray interferometry becomes viable, meshes well with the benefits gained by including a *XOSS* in the mission. For the high Earth-orbit X-ray telescope a moderate improvement in angular resolution over an appreciable fraction of the sky can be achieved through the use of a *XOSS*, however the orbital mechanics are challenging and the scientific pay-off may be modest. A technology demonstration mission along these lines may nevertheless be worthwhile.

XOSS is potentially most interesting for telescopes at L2 and other low-acceleration environments (e.g. Earth-trailing or drift-away orbits) where 1–10 mas resolution should be achievable for a wide range of sources. The ideal telescope would have an angular resolution equal to the angle subtended by the *XOSS*. Further investigations are necessary to determine whether *XOSS* is well suited to *Constellation X*, or whether a dedicated telescope with better angular resolution would be merited. Either way, it seems likely that *XOSS* could provide a natural scientific precursor to interferometric missions like *MAXIM Pathfinder*, increasing the angular resolution of X-ray telescopes by one-to-two orders-of-magnitude at relatively modest incremental expense.

The authors thank A. Chmielewski for support, A. Babul and M. Dragovan for many useful comments and suggestions, N. Choudhuri for helpful suggestions on statistical tests, P. Gorenstein and W. Zhang for comments on a preliminary version of the manuscript and C. Covault and S. Rodney for recent input. This work was supported by a DOE grant to the theoretical particle-astrophysics group at CWRU, and a phase I grant from NIAC.

REFERENCES

- Adams, D.J. et al., 1988, ApJ, 327, L65
- Baptista, R. & Steiner, J.E., 1991, A&A, 249, 284
- Baptista, R. & Steiner, J.E., 1993, A&A, 277, 331
- Copi, C.J. & Starkman, G.D., 1998, Proceedings of SPIE, 3356, March 25, 1998, Kona, HI
- Copi, C.J. & Starkman, G.D., 2000, ApJ, 532, 581
- Hagiwara, K. et. al., 2002 Phys. Rev. D, 66, 010001.
- Schneider, J., 1995, Proceeding of the workshop “Detection and Study of Terrestrial Extrasolar Planets”, May 15–17, Boulder, CO, unpublished